


WHEN ORDERING, ORDER CARTRIDGE PACKAGE 0849-00-020-A
 PACKAGE INCLUDES:
 (1) 3860-03-010 CARTRIDGE
 (1) 0391-00-313-T ORING (FOR HOLD DOWN CAP)

HILCO MODEL	GENERAL ELECTRIC	OVERALL LENGTH	O.D.	CARTRIDGE I.D.
3860-03-010	377A9818P002	36 11/16	6	2.875

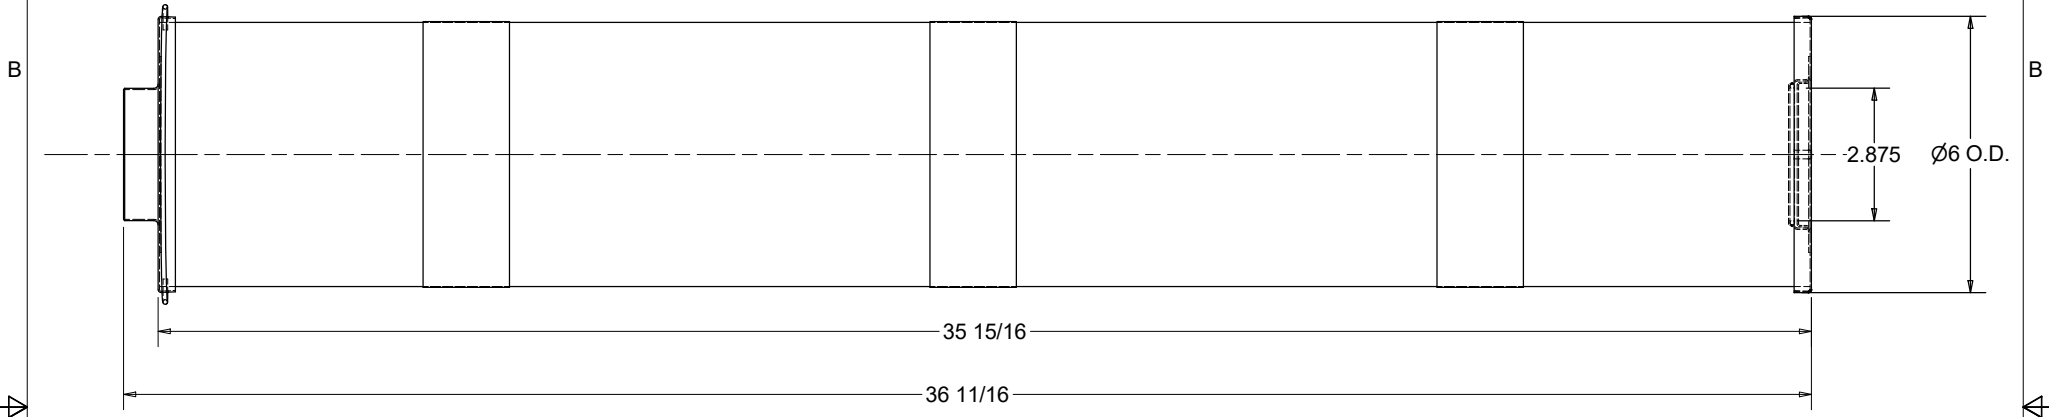

- PHYSICAL CHARACTERISTICS:
1. CORROSION RESISTANT METAL END CAPS
 2. TIN PLATE CENTERTUBE
 3. VITON O-RING
 4. SYNTHETIC FILTER MEDIA
 5. MAXIMUM OPERATING TEMPERATURE IS 250° F
 6. 100 PSI COLLAPSE STRENGTH

GE Power Generation		GENERAL ELECTRIC COMPANY Schenectady, NY	
DT- <u>VENDOR SUPPLIED DRAWING</u>			
GE NOT TO REVISE. GE REVISION LEVEL IS AS SHOWN ABOVE ON THIS APPLIQUE. THIS DOCUMENT IS FILED UNDER THE GE DRAWING NUMBER.			
THIS DOCUMENT SHALL BE REVISED IN ITS ENTIRETY. ALL SHEETS OF THIS DOCUMENT ARE THE SAME REVISION LEVEL AS INDICATED IN THIS VENDOR SUPPLIED DRAWING APPLIQUE.			
FIRST MADE FOR:		OF _____	
GE SIGNATURES	DATE	GE DRAWING NUMBER	REV.
CHECKED:			
ISSUED:			

B	DIMENSION UPDATED	SMH	7/14/2020	LTH
A3	ADDED LIFTING BAIL	LTH	10/2009	LTH
A2	ADDED RETAINING BANDS	LTH	10/2009	LTH
A1	LENGTH WAS 18.562	LTH	10/2009	LTH
LTR	DESCRIPTION	BY	DATE	APP

CURRENT REVISION LEVEL: B

DIVISION HILCO ENGINEERING

BETA RATIO & EFFICIENCY		
MODEL	BETA=200	BETA=1000
3860-03-010	25 MICRON 99.5%	27 MICRON 99.9%

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP.
 © COPYRIGHT THE HILLIARD CORPORATION
 ALL RIGHTS RESERVED

UNLESS OTHERWISE SPECIFIED
 FRACTIONAL DIMENSIONS - ± 1/64
 DECIMAL X - ± .01
 DIMENSIONS XXX - ± .005
 ANGLES - ± 30'
 BREAK CORNERS 1/4" MAX
 √ /N MICRINCHES
 DIMENSIONS ARE IN INCHES
 [] DIMENSIONS IN MM



DRAWN	LTH	DATE:	8/8/2002
CHECKED	LH		8/8/2002
APPROVED	HCR		8/8/2002

TITLE:
PLEATED CARTRIDGE

SIMILAR TO:
 SCALE: NONE

SHEET 1 OF 1
 DRAWING SIZE: B
 DD-700-132