


	PART NUMBER	MEDIA MATERIAL	FILTRATION RATING			NOTES
			99.5% (Bx=200)	98.7% (Bx=75)	90% (Bx=10)	
FOR CARTRIDGE WITH VITON ORING ADD SUFFIX "V" TO CARTRIDGE PART NUMBER EX: 3860-16-028-CV	3860-16-028-C	SYNTHETIC	1	-----	-----	DOUBLE SCREENED ELEMENT
	3860-14-036-C	SYNTHETIC	3	1	-----	DOUBLE SCREENED ELEMENT
	3860-12-008-C	SYNTHETIC	4	3	-----	DOUBLE SCREENED ELEMENT
	3860-11-038-C	SYNTHETIC	10	9	3	DOUBLE SCREENED ELEMENT
CARTRIDGE AVAILABLE WITH BAIL HANDLE AS AN OPTION ADD SUFFIX "B" TO CARTRIDGE PART NUMBER EX: 3860-16-028-CB 3860-16-028-CVB	3860-01-010-C	SYNTHETIC	15	14	10	DOUBLE SCREENED ELEMENT
	3860-03-044-C	SYNTHETIC	25	24	19	DOUBLE SCREENED ELEMENT
	3860-05-030-C	SYNTHETIC	41	40	34	DOUBLE SCREENED ELEMENT
	3860-16-030-C	CELLULOSE	1	---	---	
	3860-12-044-C	CELLULOSE	4	3	2	
	3860-02-002-C	CELLULOSE	18	17	11	
	3860-03-045-C	CELLULOSE	30	28	20	
	3860-05-031-C	CELLULOSE	44	41	32	
	3860-22-001-C	WATER ABSORBING	4	3	-----	
	3860-23-001-C	WATER ABSORBING	25	24	19	
CARTRIDGE AVAILABLE FOR USE IN NON-ORING STYLE VESSELS STANDARD FLAT GASKET IS CELLULOSE, OTHERS AVAILABLE AS OPTION ADD SUFFIX "N" TO CARTRIDGE PART NUMBER NEED TO PURCHASE 0385-00-107-B HOLD DOWN CAP EX: 3860-16-028-CN	3860-26-001-C	WATER ABSORBING	1	-----	-----	
	ET718-DR-CGV	DRY ION EXCHANGE				PATENT NO. 7,267,770
	3860-05-037-C	SYNTHETIC	41	40	34	SINGLE SCREENED ELEMENT
	3860-10-012-C	SYNTHETIC	51	50	-----	DOUBLE SCREENED ELEMENT
	3860-40-007	SYNTHETIC	110	100	-----	SINGLE SCREENED ELEMENT
	HT718-00-CGV	FULLERS EARTH	-----	-----	-----	SINGLE SCREENED ELEMENT
	3860-05-036-C	GLASS TUBE	49	46	25	
	3860-05-031-CV	CELLULOSE	44	41	32	

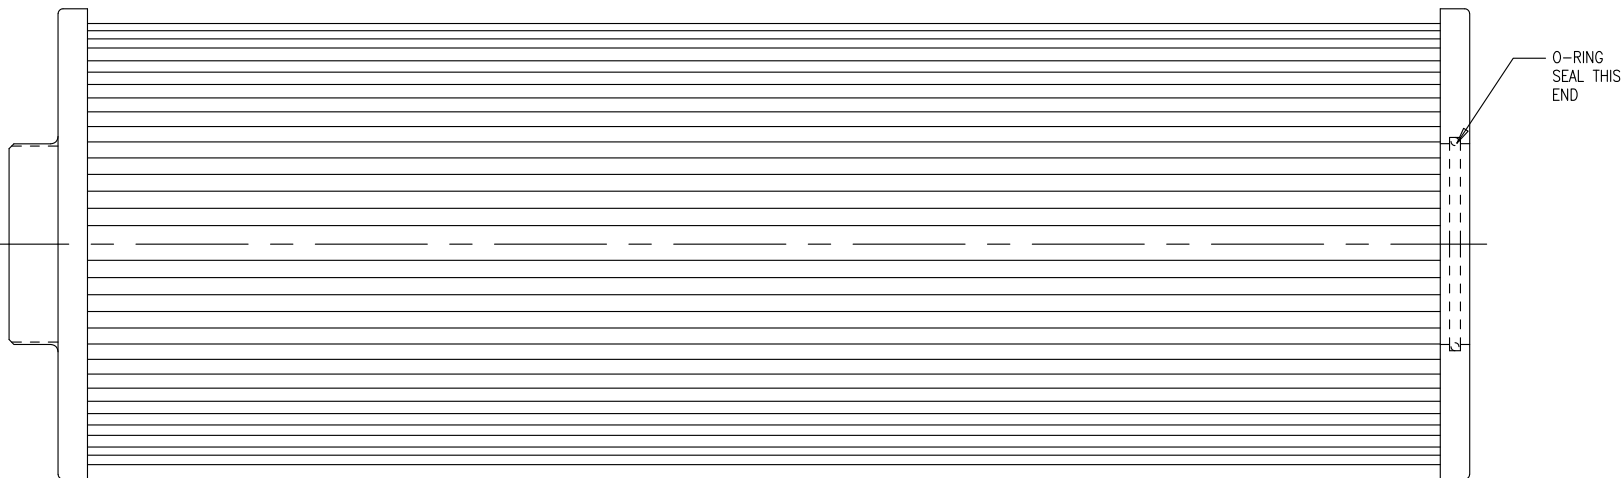

- PHYSICAL CHARACTERISTICS:
1. CORROSION RESISTANT METAL END CAPS.
 2. CORROSION RESISTANT METAL CENTERTUBE.
 3. MAX. OPERATING TEMP. IS 250° F.
 4. 100 PSI COLLAPSE STRENGTH.
 5. BUNA -N ORING STANDARD

B	REVISED MICRON RATINGS	LTH	06/02/09	LTH
A	ADDED PATENT #; ECN: 05-200700127	ROC	09/24/07	LTH
REV	DESCRIPTION	BY	DATE	APP

THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED. MAKE FROM	UNLESS OTHERWISE SPECIFIED FINISH: 125 MICROINCHES UNLESS OTHERWISE SPECIFIED BREAK CORNERS .015 MAX UNLESS OTHERWISE SPECIFIED FRACTIONAL DIMENSIONS - 1/16 DECIMAL DIMENSIONS - .001 DIMENSIONS - .001 - .005 DIMENSIONS - .005 - .020	 THE HILLIARD CORPORATION 100 WEST FORTY STREET ELMA, NEW YORK 14062 DIMENSIONS ARE IN INCHES (1) DIMENSIONS IN MM	DRAWING STATUS DRAWN: LTH 11/12/03 CHECKED: LTH 11/12/03 APPROVED: LTH 11/12/03 SIMILAR TO: SCALE: NONE	PRODUCTION TITLE "618" O-RING CARTRIDGES SHEET 1 OF 1 DD-700-150	
	THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994			DRAWING STATUS DRAWN: LTH 11/12/03 CHECKED: LTH 11/12/03 APPROVED: LTH 11/12/03 SIMILAR TO: SCALE: NONE	
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED. MAKE FROM		THE HILLIARD CORPORATION 100 WEST FORTY STREET ELMA, NEW YORK 14062 DIMENSIONS ARE IN INCHES (1) DIMENSIONS IN MM	DRAWING STATUS DRAWN: LTH 11/12/03 CHECKED: LTH 11/12/03 APPROVED: LTH 11/12/03 SIMILAR TO: SCALE: NONE	PRODUCTION TITLE "618" O-RING CARTRIDGES SHEET 1 OF 1 DD-700-150
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED. MAKE FROM		THE HILLIARD CORPORATION 100 WEST FORTY STREET ELMA, NEW YORK 14062 DIMENSIONS ARE IN INCHES (1) DIMENSIONS IN MM	DRAWING STATUS DRAWN: LTH 11/12/03 CHECKED: LTH 11/12/03 APPROVED: LTH 11/12/03 SIMILAR TO: SCALE: NONE	PRODUCTION TITLE "618" O-RING CARTRIDGES SHEET 1 OF 1 DD-700-150