


| MATERIALS OF CONSTRUCTION | |
|-------------------------------------|---------------------------|
| END CAP, O-RING INSERT & CENTERTUBE | CORROSION RESISTANT STEEL |
| ADHESIVE | URETHANE |
| COALESCER MEDIA | POLYPROPYLENE & COTTON |
| O-RING SEAL | VITON |

| PERFORMANCE | |
|----------------------------------|-----------------------------|
| CLEAN PRESSURE DROP (DM639-00-C) | 27 INCHES WATER @ 100 CFM |
| EFFICIENCY | 99.9% TOTAL EMISSIONS |
| CARRYOVER | LESS THAN OR EQUAL TO 5 PPM |
| EXPECTED LIFE | 2 YEARS |
| DISPOSAL | NORMAL OIL FILTER |
| MAXIMUM OPERATING TEMPERATURE | 250°F |
| LIQUID LOADING | 5000 MILLIGRAM/CUBIC METER |

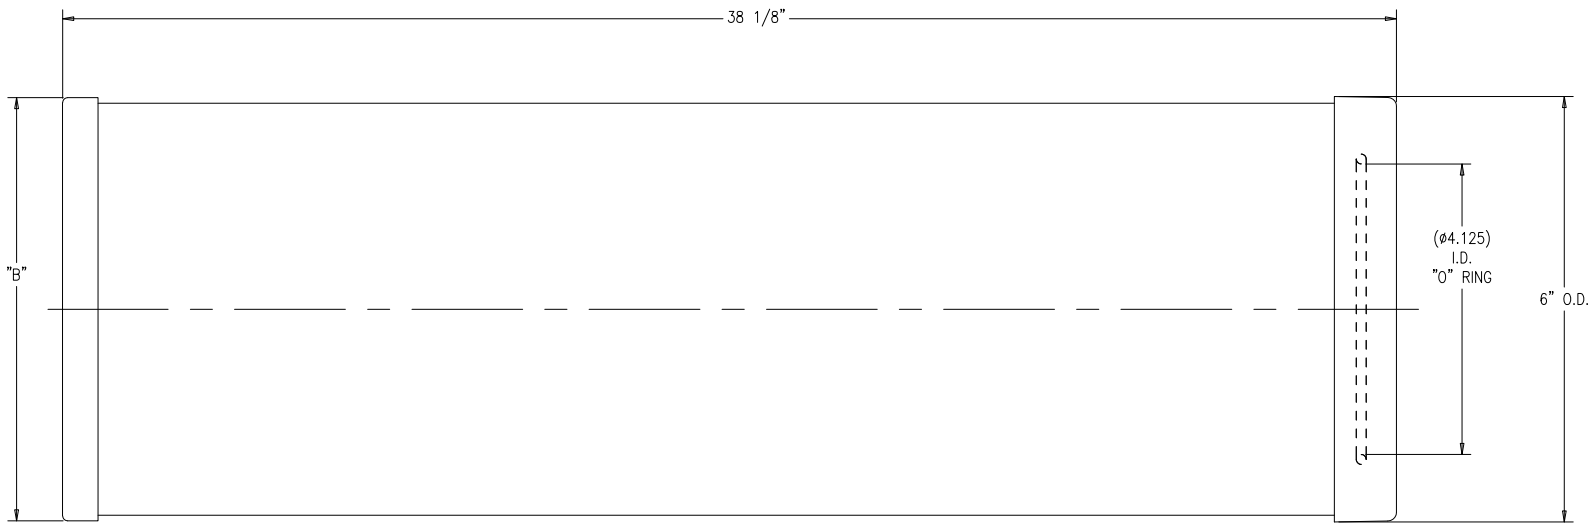

NOTE:
USE PARKER SUPER O-LUBE ON "O" RING BEFORE INSTALLING IN VESEL.

| REV | DESCRIPTION | BY | DATE | APP |
|-----|-------------|----|------|-----|
| | | | | |

THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994

| | | | | | |
|--|---|--|---------------|----------------|---|
| THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED. MAKE FROM | UNLESS OTHERWISE SPECIFIED: <input checked="" type="checkbox"/> INCHES <input type="checkbox"/> MILLIMETERS | THE HILLIARD CORPORATION 100 WEST FOURTH STREET ELMIRA, NEW YORK 14902 | DRAWN BY: LTH | DATE: 11/20/20 | PRODUCTION DATA SHEET DM639-00-C DEMISTER CARTRIDGE |
| | UNLESS OTHERWISE SPECIFIED: BREAK CORNERS .015 MAX | | CHECKED: LTH | DATE: 11/20/20 | |
| | UNLESS OTHERWISE SPECIFIED: FRACTIONAL DIMENSIONS - 1/16 DECIMAL DIMENSIONS - .XX - 1/2 ANGLES - # | | APPROVED: LTH | DATE: 11/20/20 | |
| | SIMILAR TO: SCALE: NONE | | SHEET 1 OF 1 | | |

DD-702-84 **C**