# **FLUID HANDLING:**

# TC Series T-Stand

A permanently mounted, continuous-duty system for critical applications, difficult to access equipment, or it can serve as a maintenance station.





# The Overview

# The T-Stand:

# Where It's Used

- Decontaminating systems
- Collecting oil samples for analysis

# What Can I Customize?

- Flow rates
- Sample valves
- Color
- Type of strainer
- Power configurations
- Filter media types and sizes
- Type of power phase single or three

# Performance

# **Ambient Operating Temperatures:**

• -25°F to 104°F (-32°C to 40°C)

## **Maximum Oil Temperatures:**

• 175°F (79°C)

### **High Pressure Switch:**

• Shuts down the system's motor at 65psi (5.49bar)

#### Pump Relief:

• Opens at 75psi (5.17bar) pump pressure

#### Materials:

- Frame: Carbon steel
- Paint: Industrial powder coat
- Fittings: Zinc-plated steel, brass, bronze, stainless steel, cast iron
- Pumps: Steel, Buna-N, iron, Viton®, graphite
- Hoses: EPDM or nitrile

### Weight:

Approximately 260-650lbs/
118 to 295Kg (will vary depending on system configurations)

# Viscosity Range:

ISO VG 2-680 at 100°F

## **Product Features**

#### Canisters:

Heavy-duty, industrial style with bolt-down lids and heavy gauge cylinder walls. These canisters can accept various size high-capacity microfiber glass, depth, water removal and molecular sieve elements and can be changed very easily.

#### Pump:

Continuous-duty gear pump; 1-40gpm flow rates available

#### Motor:

Washdown, heavy duty

#### Switch:

NEMA 4 industrial-duty

### **Viscosity Range:**

Up to ISO VG 680 (4000sus at 100°F)

#### Frame:

Heavy-duty rectangular tubing

### **Lifting Eye Bolts:**

Allows for easy lifting and maneuverability

#### Gauges

Pump pressure and differential pressure gauges **Strainer**:

To protect the pump


# Colors:

Standard is black; customizable colors available at no extra charge




# The Perfomance


# Example of a Three-Canister Sytem:

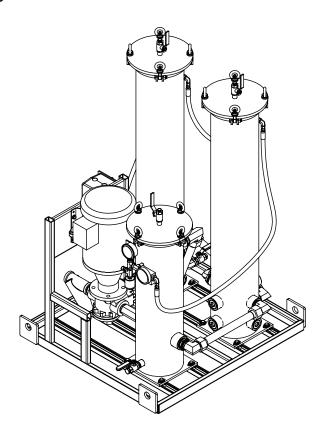


# Did You Know?

A T-stand is usually the best choice for improving equipment reliability. This is a permanently installed and always-on filtration system that cleans the oil and then keeps the oil clean.

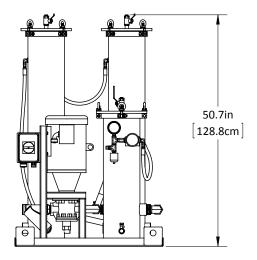

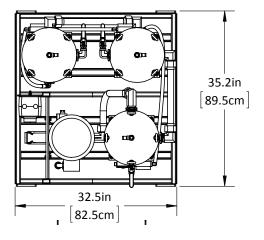

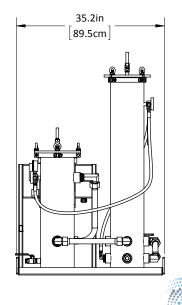



# FLUID HANDLING: The Entire Des-Case Line

We offer a full range of fluid handling and filtration products in Portable Filtration, Dedicated Filtration, Water Removal, Lubricant Storage & Filtration, Filter Elements, and Adapter Kits to suit your needs.

Customize your system today at www.descase.com.