

Des-Case Single Point Lubricator

Delivers precise, dependable oil or grease to individual lubrication points for safer, longer-running equipment.



MATERIALS & COMPONENTS:

- Polycarbonate, Polyamide

CHEMICAL COMPATIBILITY

Compatible with all mineral oils and most synthetic oils. (Contact Des-Case technical support for chemical compatibility inquiries)

PERFORMANCE SPECIFICATIONS:

	DC-SPL
² Recommended Temperature Range	-4°F to 140°F (-20°C to 60°C)
Maximum Operating Pressure	290 psi (20 bar)
Drive	Electromechanical
Power Supply	2x 1.5V AA batteries
Number of Outlets	1
³ Max Tube Length	32 ft (10 m)
⁴ Lubricants	Oil ISO VG: 32-680 cSt Grease up to NLGI-2
Reservoir Volume	4 fl. oz (120 ml)
Discharge Settings	1, 3, 6, 12 or 24 months
Protection Class	IP67



¹Note: Small variations in the manufacturing process can be common and will be within the allowable engineering tolerances. All above data is nominal and provided for information only and subject to change. All metric conversions are approximate.

²Note: Depends on battery selection and lubricant.

³Note: Based on use of NLGI-2 grease at room temperature

⁴Note: Using solid lubricants can reduce the lifetime of the motor unit.

DIMENSIONS: INCH [MM]

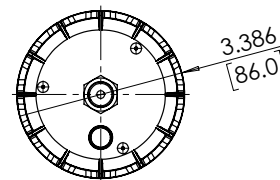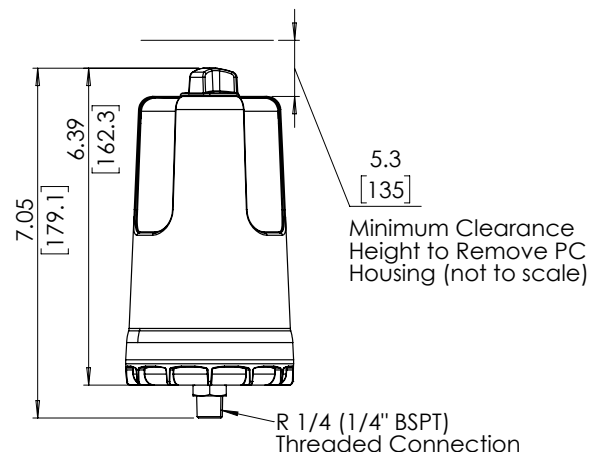

Typical Applications:

- Bearings
- Chains
- Pumps
- Electric Motors

Typical Industries:

- Food & Beverage
- Power Generation
- Manufacturing
- Oil & Gas